



## FTH-S01T-B23Y-010D

QSFP28 100GBase-LR1, ELM laser/PIN receiver, BiDi, SMF, 10km



Picture 1 Transceiver QSFP28 100G 10km

### Description

FTH-S01T-B23Y-010D series QSFP28 transceiver can be used to setup a reliable, high speed (up to 100Gbps) serial data link over single-mode fibers. Maximum link span can reach up to 10km. This module is commonly used in today's datacenter interconnections and high-speed cores of computer networks over long distance. Transmission is established over one fiber, where one CWDM channel. Outstanding immunity to EMI interferences (thanks to case made from metal alloys) and great overall performance allows for deployment of high port density systems. Casing made fully from metal alloys ensures very good EMI immunity. Module is fully compliant with QSFP28 MSA and IEEE 802.3ba 100GBASE-LR specification. Host device can access module internal EEPROM memory and DDMI via I2C interface. Built-in digital diagnostic interface (DOM, DDMI) allows a network administrator to monitor each channel's parameters such as: transmitted and received optical power, temperature, supply voltage and laser current. Those information and data are very helpful e.g. in prediction and prevention of connection failures. A module is available in various dedicated versions, which can be compatible with devices from vendors such as Cisco, Juniper, Alcatel-Lucent and Huawei.

### Applications

- 100GBASE-ER1 & 100G Ethernet
- Telecom networking
- Data Center



## Key features

- LC Simplex connector
- Transmission distance up to 10km\*
- Supports single 53,125GB optical lane
- Supports 106,25Gb/s aggregate bit rate
- Fully compliant with QSFP28 MSA and SFF-8661, SFF-8636
- Hot-Pluggable
- RoHS-6 compliant
- Class 1 laser safety
- Low power consumption (4,5W)
- Metal case for low EMI
- Operating case temperature: 0~70°C

## Specification

### Supported transmission technology

Ethernet

### Speed supported for Ethernet technology

106,25Gbps

### Speed supported for Fibre Channel technology

-

### Transmission medium

Single-mode fiber 9/125µm

### Transmission distance\*

10km

### Receptacle type

LC Simplex

### Wavelength

TX: 1271nm; RX: 1331nm

### Output power

+0,7dBm~+4,7dBm

### Receiver sensitivity

-6,1dBm(OMA)

### Power supply voltage

3,3V

### Power Dissipation

4,5W

### Operating environment – temperature

0~70°C

### Operating environment - humidity

15~85% non-condensing

### Dimensions


Compliant with QSFP28 Multi-Source Agreement

\* - transmission distance depends on optical link attenuation




## Detailed technical specification

### Pin Description

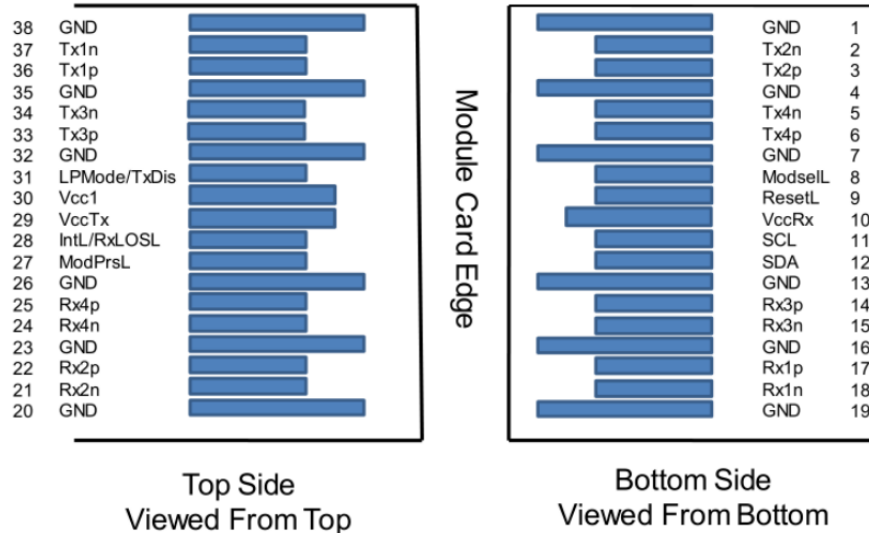

Picture 2 MSA compliant Connector

| Pin | Name    | Function/Description                             | Notes |
|-----|---------|--|-------|
| 1   | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 2   | Tx2-    | Transmitter Inverted Data Input                  | -     |
| 3   | Tx2+    | Transmitter Non-Inverted Data Input              | -     |
| 4   | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 5   | Tx4-    | Transmitter Inverted Data Input                  | -     |
| 6   | Tx4+    | Transmitter Non-Inverted Data Input              | -     |
| 7   | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 8   | ModSelL | Module Select                                    | -     |
| 9   | ResetL  | Module Reset                                     | -     |
| 10  | VccRx   | 3.3V Power Supply Receiver                       | -     |
| 11  | SCL     | 2-Wire serial Interface Clock                    | -     |
| 12  | SDA     | 2-Wire serial Interface Data                     | -     |
| 13  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 14  | Rx3+    | Receiver Non-Inverted Data Output                | -     |
| 15  | Rx3-    | Receiver Inverted Data Output                    | -     |
| 16  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 17  | Rx1+    | Receiver Non-Inverted Data Output                | -     |
| 18  | Rx1-    | Receiver Inverted Data Output                    | -     |
| 19  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 20  | GND     | Transmitter Ground (Common with Receiver Ground) | 1     |
| 21  | Rx2-    | Receiver Inverted Data Output                    | -     |

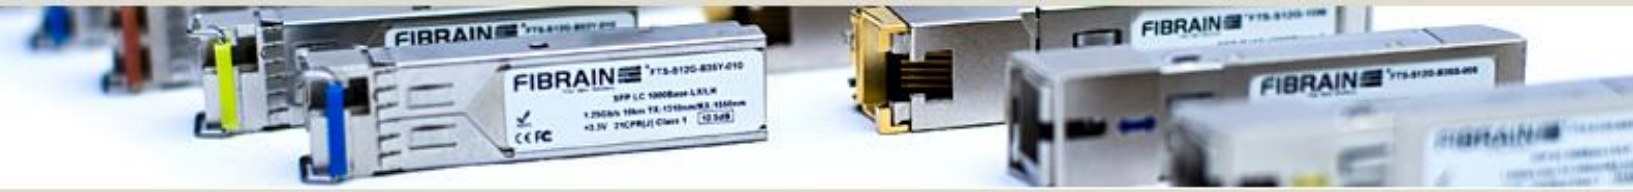

|    |              |  |   |
|----|--------------|--|---|
| 22 | Rx2+         | Receiver Non-Inverted Data Output                | - |
| 23 | GND          | Transmitter Ground (Common with Receiver Ground) | 1 |
| 24 | Rx4-         | Receiver Inverted Data Output                    | - |
| 25 | Rx4+         | Receiver Non-Inverted Data Output                | - |
| 26 | GND          | Transmitter Ground (Common with Receiver Ground) | 1 |
| 27 | ModPrsL      | Module Present                                   | - |
| 28 | IntL/RxLOSL  | Interrupt  | - |
| 29 | VccTx        | 3.3V power supply transmitter                    | - |
| 30 | Vcc1         | 3.3V power supply                                | - |
| 31 | LPMoDe/TxDiS | Low Power Mode                                   | - |
| 32 | GND          | Transmitter Ground (Common with Receiver Ground) | 1 |
| 33 | Tx3+         | Transmitter Non-Inverted Data Input              | - |
| 34 | Tx3-         | Transmitter Inverted Data Input                  | - |
| 35 | GND          | Transmitter Ground (Common with Receiver Ground) | 1 |
| 36 | Tx1+         | Transmitter Non-Inverted Data Input              | - |
| 37 | Tx1-         | Transmitter Inverted Data Input                  | - |
| 38 | GND          | Transmitter Ground (Common with Receiver Ground) | 1 |

**Notes:**


1. The module signal grounds are isolated from the module case.

**Electrical parameters**

| Parameter             | Symbol          | Min. | Typ. | Max. | Unit |
|-----------------------|-----------------|------|------|------|------|
| Power Dissipation     | P <sub>D</sub>  |      |      | 4    | W    |
| Module Supply Current | I <sub>cc</sub> |      |      | 1276 | mA   |

**Transmitter parameters**

| Parameter                             | Unit             | min    | type | max    | Note |
|---------------------------------------|------------------|--------|------|--------|------|
| Transmit wavelength                   | nm               | 1264,5 | 1271 | 1277,5 |      |
| Launch Optical Power(Average)         | dBm              | -1,4   |      | 4,5    |      |
| Launch Optical Power(OMA)             | dBm              | 0,7    |      | 4,7    |      |
| Extinction Ratio(ER)                  | dB               | 3,5    |      |        |      |
| RIN OMA                               | dB/Hz            |        |      | -136   |      |
| Optical Return Loss Tolerance         | dB               |        |      | 15,6   |      |
| P <sub>out</sub> @TX-Disable Asserted | P <sub>off</sub> |        |      | -30    |      |

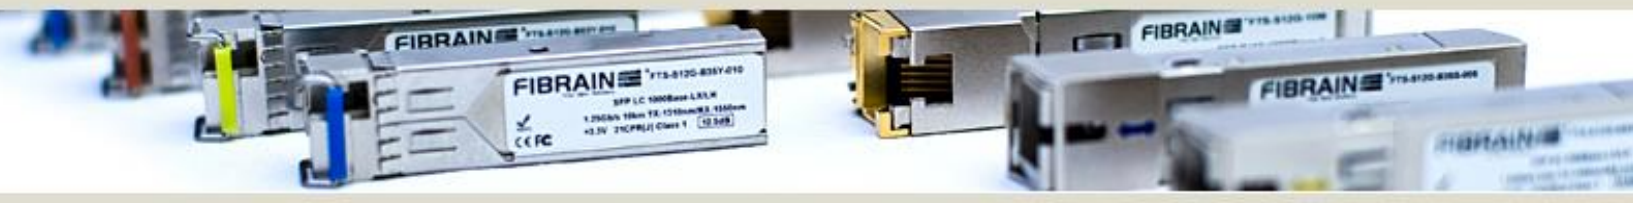

## Receiver parameters

| Parameter                  | Unit | min    | type | max    | Note |
|----------------------------|------|--------|------|--------|------|
| Center Wavelength          | nm   | 1324,5 | 1331 | 1337,5 |      |
| Receiver sensitivity (OMA) | dBm  |        |      | -6,1   |      |
| Receiver Overload          | dBm  | 4,5    |      |        |      |
| Receiver reflectance       | dBm  |        |      | -26    |      |
| LOS Assert                 | dBm  | -18    |      |        |      |
| LOS De-Assert              | dBm  |        |      | -12    |      |
| LOS Hysteresis             | dB   | 0,5    |      |        |      |

## Recommended environment conditions

| Parameter                   | Symbol          | Min   | Typ | Max   | Unit |
|-----------------------------|-----------------|-------|-----|-------|------|
| Operating Temperature Range | T               | 0     |     | 70    | °C   |
| Supply Voltage              | V <sub>CC</sub> | 3,135 | 3,3 | 3,465 | V    |
| Relative Humidity           | RH              | 15    | -   | 85    | %    |
| Link Distance with          |                 |       |     | 10    | km   |

## Ordering information

FTH-S01T-B23Y-010D– QSFP28, 100G, BiDi, TX:1271nm, RX:1331nm, 10km, single-mode, LC Simplex, **DDMI**, commercial temperature (0~70°C)

For further information regarding host device PCB layout recommendation, power supply requirements, EEPROM memory map, DDMI specification please check:

[SFF-8436 - Technical specification for QSFP transceiver](#) and [SFF-8665 - Technical specification for QSFP28 transceiver](#)

Fibrain Sp. z o.o. reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application.

Pictures used for reference only, actual product look may differ. For most actual information please contact technical support via [aktywa@fibrain.pl](mailto:aktywa@fibrain.pl)