


Suspension Spiral clamp for round cables AT-SSFOC

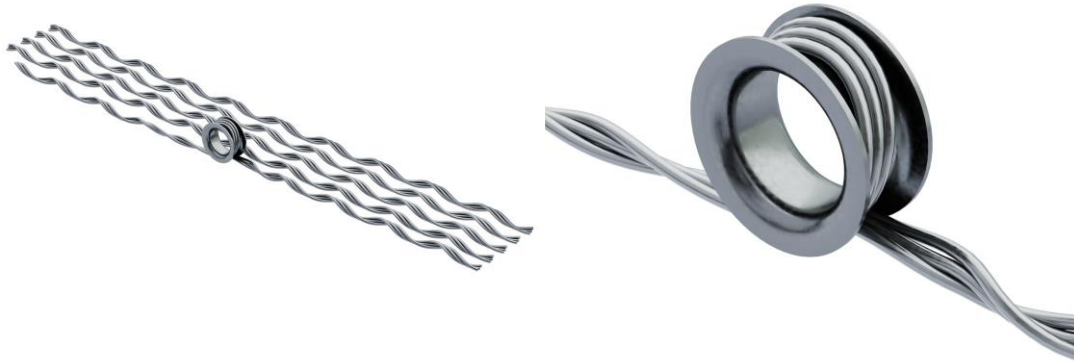

*:illustrative photo

DESCRIPTION

- Spiral delivered in 3 components: suspension, protecting rods and round thimble
- Maximum span 220 m
- Resistant to extreme climatic conditions
- Harmless for the outer sheath (coating) of the cable
- Chamfered wire tips
- Available versions for different cable dimensions
- Contains a suspension, protecting rods and round thimble

TECHNICAL SPECIFICATION

Weight [kg]	0,660	0,660	0,670	0,675	0,715	0,755	0,800	0,805	0,855	0,900	0,910
Cable diameter range [mm]	8,80-9,29	9,30-9,89	9,90-10,49	10,5-11,09	11,1-11,79	11,8-12,49	12,5-13,29	13,3-14,09	14,1-14,89	14,9-15,89	15,9-16,79
Spiral Material	Galvanized steel according to ASTM 498 Class A or Aluminum Clad Steel										
Round Thimble material	Galvanized steel										

ORDERING

AT-SSFOC-88-93 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 8,80-9,29mm
 AT-SSFOC-93-99 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 9,30-9,89mm
 AT-SSFOC-99-105 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 9,90-10,49mmC
 AT-SSFOC-105-111 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 10,50-11,09mm
 AT-SSFOC-111-118 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 11,10-11,79mm
 AT-SSFOC-118-125 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 11,80-12,49mm
 AT-SSFOC-125-133 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 12,50-13,29mm
 AT-SSFOC-133-141 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 13,30-14,09mm
 AT-SSFOC-141-149 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 14,10-14,89mm
 AT-SSFOC-149-159 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 14,90-15,89mm
 AT-SSFOC-159-168 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 15,90-16,79mm
 AT-SSFOC-168-178 - Spiral suspension clamp for ADSS Cables, span up to 220m, cable diameter range 16,80-17,79mm

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed