


Type:	Installation cable	14.07.2017
	F/UTP Cat.6 4PR LSZH 350 MHz	REV: 0
Ref:	XQ100.116 XQ100.117	G

Installation cable Cat.6 F/UTP 4PR LSZH CPR Class D_{CA} 350 MHz

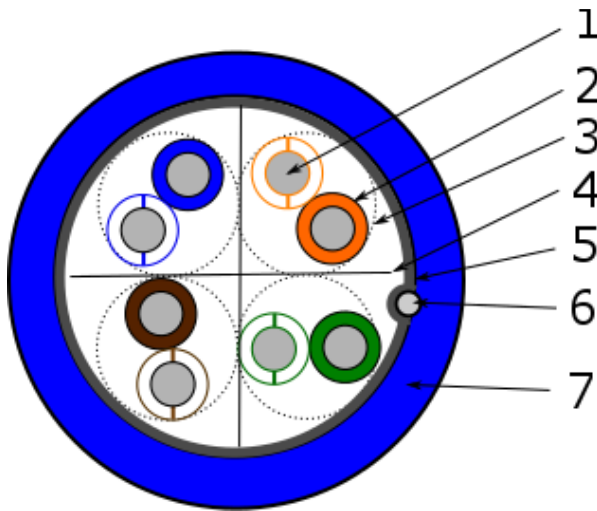

CONSTRUCTION:

- 1 – Conductor**
Material: solid bare annealed copper.
Nominal diameter: 23 AWG.
- 2 – Insulation**
Material: polyolefin.
Nominal diameter: 1.1 mm.
- 3 – stranded wires**
Pair: 2, twisted insulated conductors.
Number of pairs: 4, all twisted together.
- 4 – Cross separator**
- 5 – Screen:** aluminum / polyester tape.
- 6 – Drain wire:** solid tinned annealed copper
- 7 – Outer sheath**
Material: LSZH.
Color: blue (RAL 5015)

STANDARDS

ISO/IEC 11801
EN 50173
IEC 61156-5
EN 50288-2-1
IEC 60332-1-2
IEC 60754-1/2
IEC 61034-1/2

SUPPORTED APPLICATIONS

10BASE-T (IEEE 802.3)
100BASE-T (IEEE 802.3)
1000BASE-T (Gigabit Ethernet)
100BASE-VG-AnyLAN
100 Mbps TP-PMD (ANSI X3T9.5)
4/16 Mbps TOKEN RING (IEEE 802.5)
PoE/PoE+

ORDERING

XQ100.116 – Reel 500m
XQ100.117 – Reel 1000m

MECHANICAL CHARACTERISTICS

Min. bending radius in operation	25	mm
Min. bending radius during installation	45	mm
Max. pulling tension	80	N
Nominal weight	45.0	kg/km
Nom. outer diameter	6.9	mm
Nom. wire diameter	23	AWG

ELECTRICAL CHARACTERISTICS @ 20°C

Max. DC Resistance:	95.0	Ω/km
Nom. Mutual Capacity @1kHz	56	nF/km
NVP:	70	%
Mean input Impedance:	100 ± 5 @ 100MHz	Ω
Propagation delay @10MHz:	max. 518	ns
Delay Skew:	max. 40	ns/100m
Segregation class	c	-
Max.operating voltage (V dc):	80	V DC
Max. DC intensity per conductor	3.3	A/mm ²

TEMPERATURE CHARACTERISTICS

Storage Temperature	-20 to +70	°C
Operating Temperature	-20 to +70	°C
During installation	-5° to +50	°C

ENVIRONMENTAL CHARACTERISTICS

Jacket material	LSZH
Flammability	Acc. to IEC 60332-1-2; IEC 60754-1/2; IEC 61034-1/2 EN50575; D_{CA}-s2,d2,a1 ; DoP 0007
Calorific value	0.868 MJ/m

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.

TRANSMISSION CHARACTERISTICS

Frequency	Attenuation	NEXT	PS-NEXT	ELFEXT ACR-F	PS-ELFEXT PSACR-F	ACR	PS-ACR	RL
MHz	dB/100m (max.)	dB (min.)	dB (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)
1*	2.1	75.3	72.3	68.0	65.0	73.2	70.2	20.0
4	3.8	66.3	63.3	58.0	55.0	62.5	59.5	23.0
8	5.2	61.8	58.8	51.9	48.9	56.5	53.5	24.5
10	5.9	60.3	57.3	50.0	47.0	54.4	51.4	25.0
16	7.4	57.2	54.2	45.9	42.9	49.9	46.9	25.0
25	9.2	54.3	51.3	42.0	39.0	45.0	42.0	24.3
31.25	10.3	52.9	49.9	40.1	37.1	42.6	39.6	23.6
62.5	14.5	48.4	45.4	34.1	31.1	33.8	30.8	21.5
100	18.4	45.3	42.3	30.0	27.0	26.9	23.9	20.1
155	22.9	42.4	39.4	26.2	23.2	19.5	16.5	18.8
200	26.1	40.8	37.8	24.0	21.0	14.7	11.7	18.0
250	29.2	39.3	36.3	22.0	19.0	10.1	7.1	17.3
300*	32.0	38.1	35.1	20.5	17.5	6.1	3.1	17.3
350*	34.7	37.1	34.1	19.1	16.1	2.5	1.0	17.3

* For information only

CABLE MARKING

FIBRAINDATA CABLE CAT6 F/UTP 4PR 23 AWG 350MHZ NVP 70% LSZH CPR CLASS Dca ISO/IEC11801 EN50173 ANSI/TIA/568-C.2 JJJJ XQ100.11P OFRRRRRR . XXXXX M

Where:

JJJJ: production year
P: 6 for 500m reel, 7 for 1000 reel
OFRRRRRR: manufacturer order
XXXXX: length