


Type:	Adapter panel for FB8000 closure	
Ref:	FB8000.AP	REV: 1.1
Date:	27.11.2013	WM
Modification:	08.04.2021	DP

Distribution fiber

FB8000.AP Fibrain adapter panel for FB8000 closure

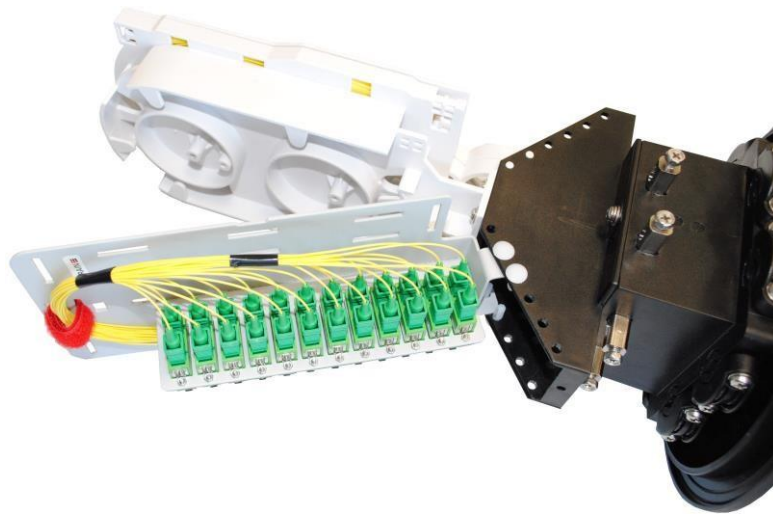


DESCRIPTION:

- Maximum capacity of 12 SC DX adapters
- Easy installation
- Possibility of mounting Alubox splitters
- Compatible with FB8000.41 and FB8000.61

TECHNICAL SPECIFICATION:

Technical data	FB8000.41	FB8000.61
Maximum splice capacity of closure with adapter panel	72	120
Maximum number of splice cassettes with adapter panel	3	5
Maximum adapter quantity	12 SC DX	
Panel dimensions (w) x (l) x (d) [mm]	110x220x50	
Working temperature	-40°C - +65°C	
Material	Powder painted steel	
Colour	RAL 7035	

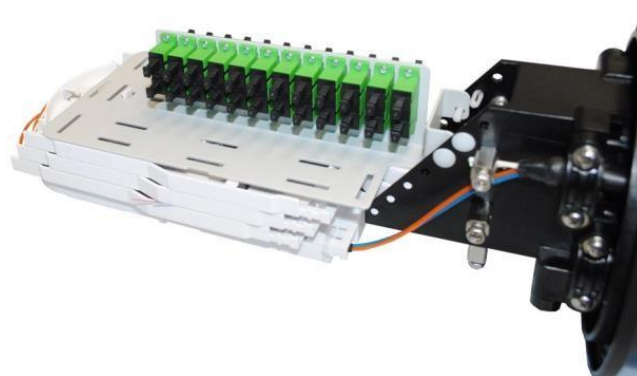

ORDERING INFORMATION:

FB8000.AP

Fibrain adapter panel for 12 SC DX for FB8000 closures

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.