


## Installation cable Cat.7A S/FTP 4PR LSFRZH CPR Class B2<sub>CA</sub> 1200 MHz

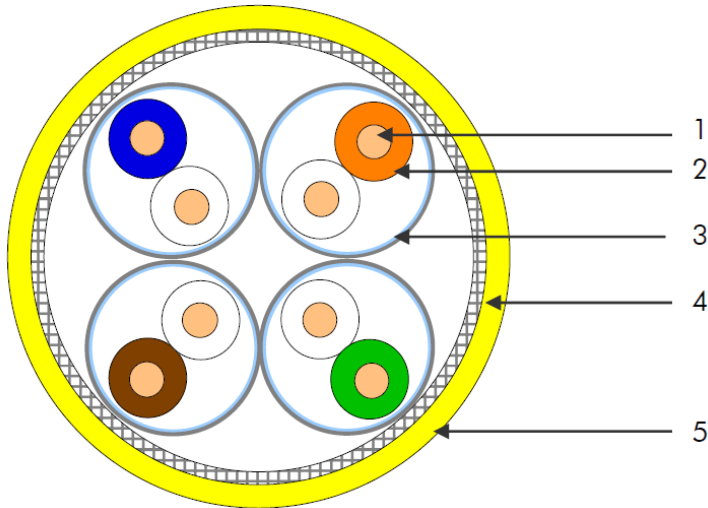

### CONSTRUCTION:

- 1 – Conductor**  
Material: solid bare annealed copper.  
Nominal diameter: 23 AWG/0,58 mm
- 2 – Insulation**  
Material: Foam skin polyethylene.  
Nominal diameter: 1.4 mm.  
**stranded wires**  
Pair: 2, twisted insulated conductors.  
Number of pairs: 4, all twisted together.
- 3 – Individual screen:** aluminum / polyester tape.
- 4– Screen:** Tinned copper braid
- 5 – Outer sheath**  
Material: LSFRZH.  
Color: yellow (RAL 1021)

### STANDARDS

ISO/IEC 11801  
EN 50173  
IEC61156-5  
EN 50288-9-1  
IEC 60332-1-24  
IEC 60754-1/2  
IEC 61034-1/2

### SUPPORTED APPLICATIONS

100BASE-T  
1000BASE-T  
2,5GBase-T  
5GBase-T  
10GBASE-T  
Power over Ethernet

### ORDERING

**XS1451048130** – Reel 500m

### MECHANICAL CHARACTERISTICS

Min bending radius without a load	4 x D	mm
Min bending radius with a load	8 x D	mm
Max. tensile force	140	N
Weight	71	kg/km
Copper content	39	kg/km
Outer diameter	7.9	mm
Wire diameter	23	AWG

### ELECTRICAL CHARACTERISTICS @ 20°C

Loop resistance	135	Ω/km
Max resistance unbalance	2	%
Min. insulation resistance (500V)	5000	MΩ*km

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.

Nom. mutual capacitance @800Hz	43	nF/km
Max capacitance unbalance	1500	pF/km
Nominal velocity of propagation NVP	76	%
Max propagation delay	439	ns/100m
Max delay skew	12	ns/100m
Test voltage	1000	V
Mean characteristic impedance @ 100 MHz	100 ± 5	Ω
Max Transfer impedance @ 1 MHz	5	mΩ/m
@ 10 MHz	5	mΩ/m
@ 30 MHz	10	mΩ/m
Segregation classification acc. EN 50174-2	D	-
Min coupling attenuation	85	dB

## ENVIRONMENTAL CHARACTERISTICS

Temperature range during storage	-20 to +60	°C
Temperature range during operation	-20 to +60	°C
Temperature range during installation	0 to +50	°C

## FIRE REACTION

Fire load	615	MJ/km
Jacket material	LSFRZH acc to: IEC 60332-1-24, IEC 60754-1/2; IEC 61034-1/2	
Euroclass acc. CPR (EN 50575)	<b>B2ca-s1a,d1,a1; DWU 00125P</b>	

## NOMINALNE CHARAKTERYSTYKI TRANSMISYJNE

Frequency	Attenuation	NEXT	PS-NEXT	ACR	PS-ACR	ACR-F	PS-ACR-F	RL
MHz	dB/100m	dB	dB	dB/100m	dB/100m	dB/100m	dB/100m	dB/100m
1,0	1,8	100	97	98	95	105	103	22
4,0	3,4	100	97	97	94	93	91	25
10,0	5,4	100	97	95	92	85	83	27
16,0	6,8	100	97	93	90	81	79	27
20,0	7,7	100	97	92	89	79	77	27
31,2	9,6	100	97	90	87	75	73	26
62,5	13,7	100	97	86	83	69	67	24
100,0	17,4	100	97	83	80	65	63	22
125,0	18,6	95	92	76	73	63	61	21
155,5	19,5	95	92	75	69	61	59	21
175,0	22,1	92	89	70	67	60	58	20
200,0	25,0	92	89	67	64	59	57	20
250,0	28,1	90	87	62	59	57	55	19
300,0	30,9	89	86	58	55	55	53	19
450,0	37,4	87	84	50	47	52	50	19
600,0	44,8	85	82	40	37	49	47	19
1000,0	58,4	82	79	24	21	57	54	19
*1200,0	63,4	81	78	19	16	52	49	17

\* Informative only.

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.

Type:	Installation cable	24.07.2020
	S/FTP Cat.7A 4PR LSFRZH 1200 MHz	REV: 0
Ref:	XS1451048130	P

**CABLE MARKING**

*FIBRAINDATA CABLE CAT7A S/FTP 4PR 23 AWG 1200MHZ NVP 76% LSFRZH CPR CLASS B2ca ISO/IEC11801 EN50173 ANSI/TIA/568.2-D JJJJ XS1451048130 OFRRRRRR . XXXXX M*

Where

- JJJJ:** production year
- OFRRRRRR:** manufacturer order
- XXXXX:** length

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.