

Holder for HD Patch panel for 6 x RJ45, screened, empty



Description:

- Flexible configuration system:
 - Modularity up to 1 port,
 - Support for all categories of Fibrain HD, screened connection modules: kat.5/s, kat.6/s, kat.6A/s
 - Method of installing connection modules: without adapter
 - Optional port labeling
- Dedicated places for cable fastening
- Max density: 6xRJ45/s per holder
- Max density in HD patch panel: 8 holders per HD patch panel

Technical specification

Material:

Plastic

Color:

Black RAL 9005

Temperature range:

-40°C do +70°C

Ingress protection:

IP 20 acc. to EN 60529.


Weight:

0,02 kg

Scope of supply:

Empty holder

Typ:	HD Patch panel	11.09.2019
		REV: 0
Ref:	XMS00	MSO

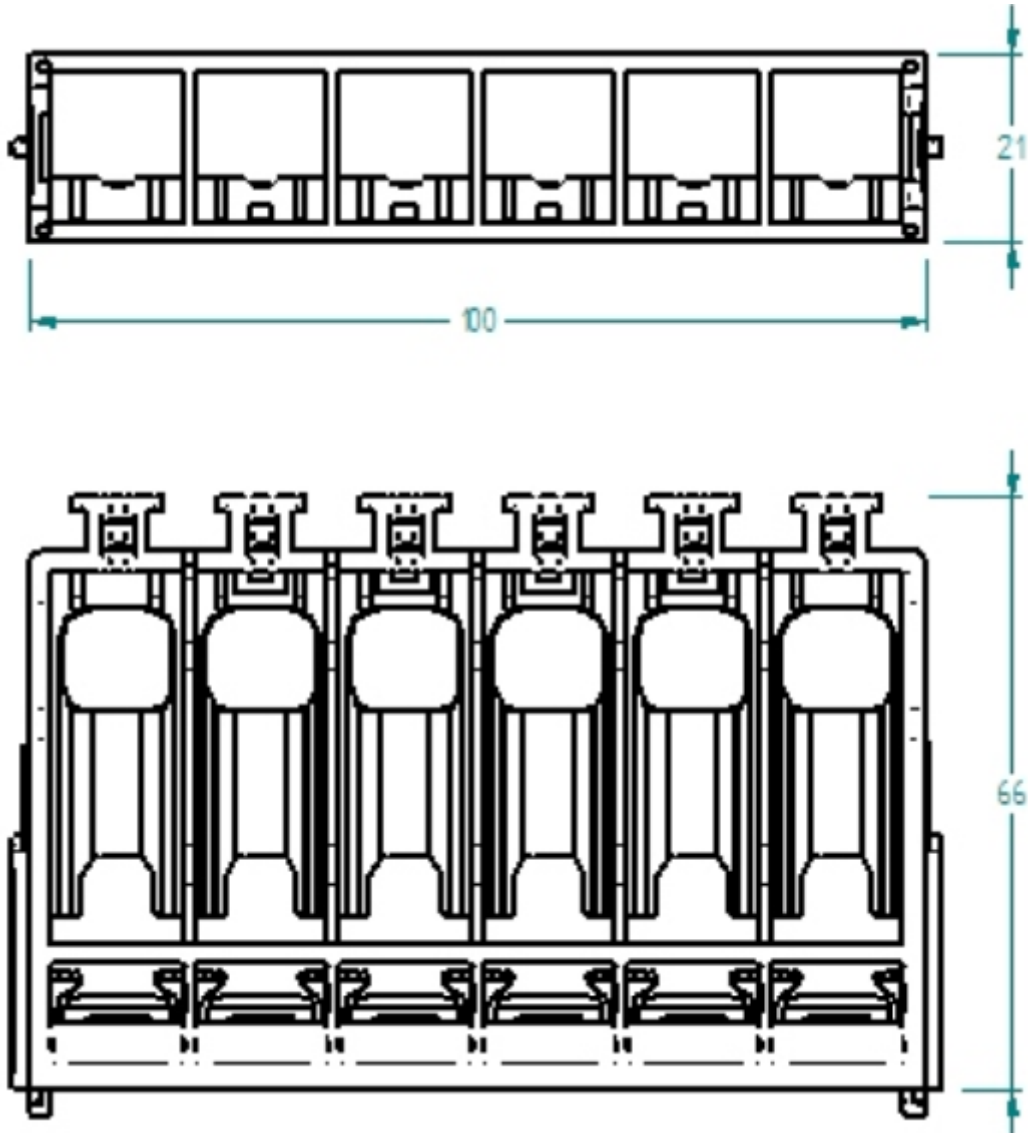

Dimensions			Reference number
Height [U = 44,45mm]	Width [mm]	Depth [mm]	
0,5	100	66	XMS00

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor