

 Type:
 Fiber optic closure, thermic type

 PN:
 FOBP-R-T1-RX,
 REV: 1.0

 Date:
 06.11.2023
 DP

 Modification:

FIBRAIN FOBP-R-T1-RX fiber optic closure, thermic type of ports seals



### **DESCRIPTION:**

- Maximum capacity 48 splices
- · Equipped in fiber organizer
- Thermic type of port seals
- 12 round cable entry and 1 oval port for uncut cables
- Pole and wall mounting
- Handles hybrid cable (fibre and copper paires)
- Customized mounting for Voltserver Receiver
- DIN rail with 12 electric quick connectors


### **TECHNICAL SPECIFICATION:**

Technical data	FOBP-R-T1-RX
Max. number of splices	48
Max. number of splice trays	4
Max. splice tray capacity	12
Range of cable diameter for 8 round ports [in]	0,12" - 0,39"
Range of cable diameter for 4 round ports [in]	0,23" - 0,79"
Range of cable diameter for oval port [in]	0,31" - 1"
Max. number of cable entrances	13
Dimensions [inch]	11,54" x 17,24" x 6,39"
Sealing type of ports	thermic
Type of entrance cables	Duct cables, aerial cables
Working temperature	-40°C - +70°C
IP protection	IP68



Туре:	Fiber optic closure, thermic type	
PN:	FOBP-R-T1-RX,	REV: 1.0
Date:	06.11.2023	DP
Modification:	-	-



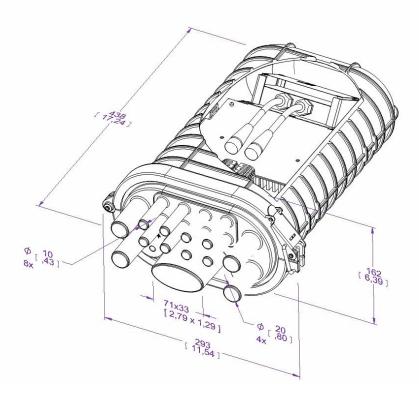



# Type: Fiber optic closure, thermic type PN: FOBP-R-T1-RX, REV: 1.0 Date: 06.11.2023 DP Modification:

### **EQUIPMENT:**

Components	Qty
Dome of fiber optic closure	1 pcs
Base of fiber optic closure	1 pcs
Internal cable organizer	1 pcs
Clamp	1 pcs
Installation clamp	2 pcs
Seal	1 pcs
Splice trays holder	1 pcs
Splice tray SCM-C-12H-GY	4 pcs
Seal kit for 8 round ports FOBP.U2	1 pcs
Seal kit for 4 round ports and oval port FOBP.U1	1 pcs
Wall-mounting adapter	1 pcs
Accessories set (clip with glue, sand paper, aluminium tape, insulating tape, cable ties)	1 pcs
Quick electric connector	12 pcs
Velcro tapes for cable tubes arrangement, width 16 mm	20 cm

## ADDITIONAL EQUIPMENT:

Splice tray	SCM-C-12H-GY
Splice trays holder (capacity up to 4x SCM-C-12H-GY)	SCM-C-H-GY
Cable reserve frame	SZ-D-FOBP-ZN-P
Bottom mounting holder for cable reserve frame	UMD-SZ-D-FOBP-ZN-P
Upper quick block mechanism for cable reserve frame with bottom mounting holder	UMD-BG-ZN-P
Fibrain quick mounting holder for FOBP closure	FOBP.USM
Accessories set (clip with glue, sand paper, aluminium tape, insulating tape, cable ties)	FOBP.AS



Type:	Fiber optic closure, thermic type	
PN:	FOBP-R-T1-RX,	REV: 1.0
Date:	06.11.2023	DP
Modification:	-	-

Seal kit for thermic ports, heatshrinks for oval ports and 4 pcs for round ports for 20 mm cable diameter	FOBP.U1
Seal kit for thermic ports, heatshrinks for 8 pcs for round ports for 10 mm cable diameter	FOBP.U2

### **ORDERING INFORMATIONS:**

FOBP-R-T1-RX-410

FIBER OPTIC CLOSURE THERMIC BASE, 48F, 1X SPLICE TRAYS HOLDER, 4X SCM-C-12H-GY SPLICE HOLDER, 12X QUICK ELECTRIC CONNECTOR

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.

